




Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°F)	< -14	-14÷50	50÷95	> 95
	VG (cSt = mm²/s)	16	22	32	46
Optimale kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested			VI > 100		
Oil filtering			> 2900 PSI: 10 µm < 2900 PSI: 25 µm		
Inlet pressure			1,45 ÷ 29 PSI		
Pump rotation			Unidirectional (Right or Left)		
Verify that pump is, at least, 100 mm under the minimum level of the tank. Before starting the pump bleed the air.					

Dimensions

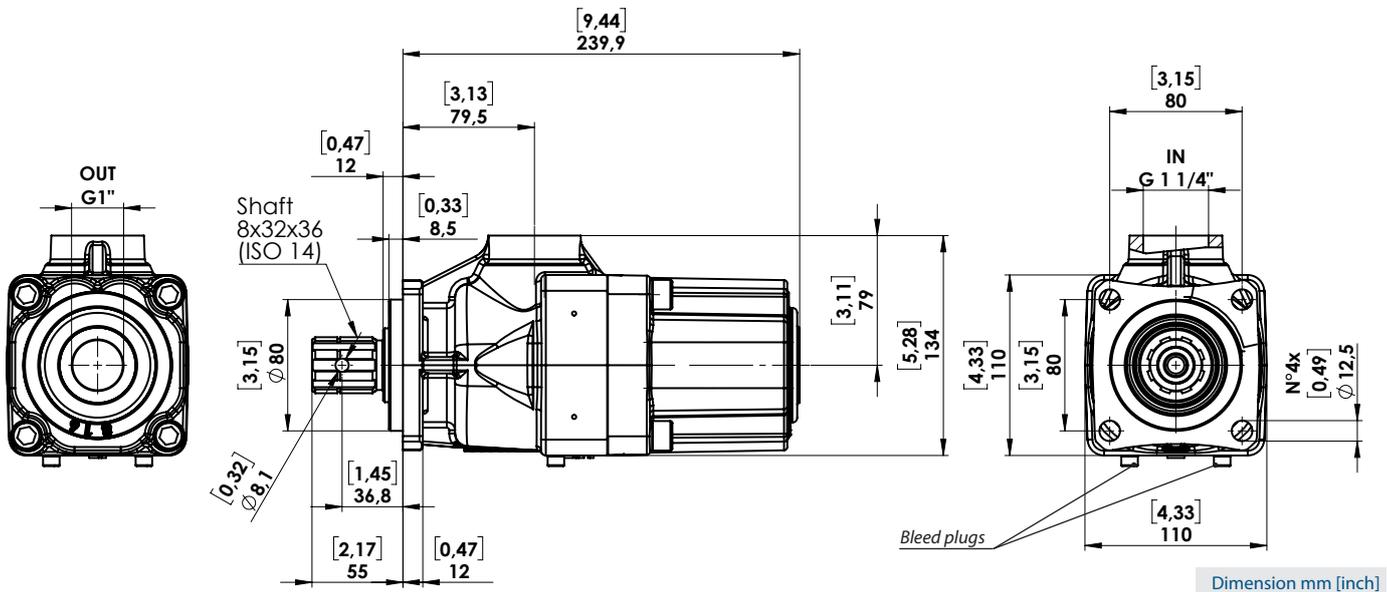

Pump type	Code	Displacement inch³/rev	Pressure		Max speed rpm	Weight lb
			Max	Peak		
			PSI	PSI		
DARK-21	10800502120	1,23	5076	5801	1800	31
DARK-28	10800502826	1,67				
DARK-35	10800503521	2,05				
DARK-42	10800504226	2,47				
DARK-48	10800504824	2,88				
DARK-52	10800505225	3,17	4351	5076	1500	30,6
DARK-55	10800505529	3,29				
DARK-60	10800505921	3,61				


Spares kit

• 10890300027 (Seal kit)




Link:
Spare parts

Flow

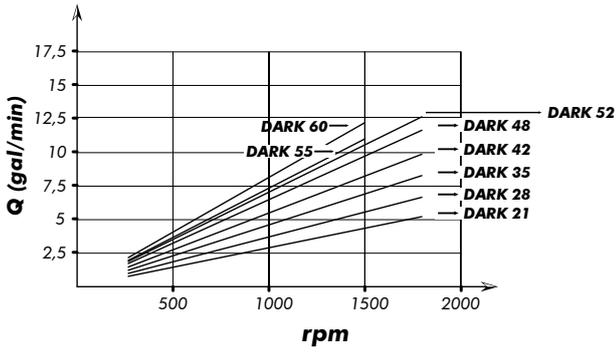

Drive torque

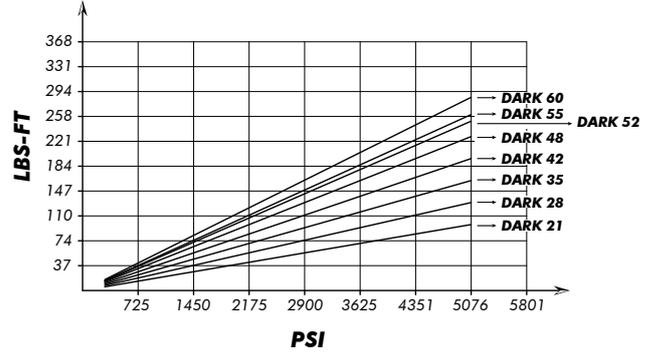

Power input

