
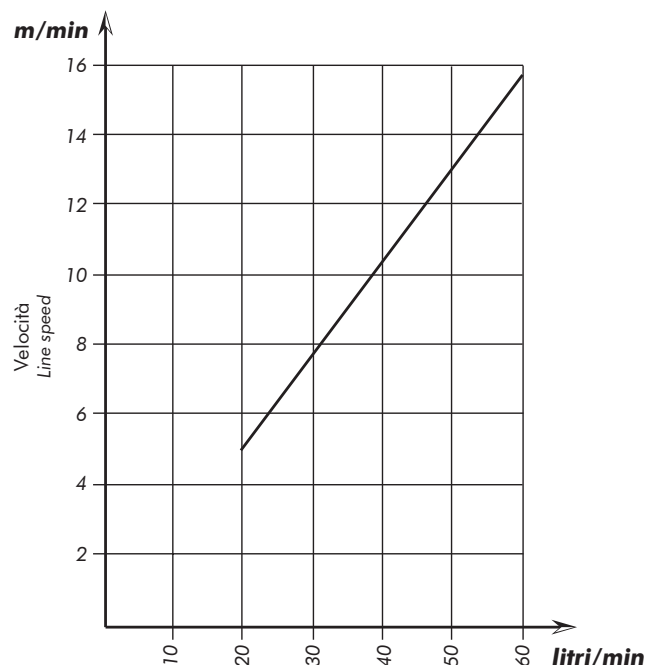


Versione verricello Winch version	Rapporto riduzione Ratio	Diametro cavo Wire rope size	Strato Layer	Capacità di tiro diretto Line pull	Versione verricello Winch version	Diametro cavo Wire rope size	Portata Flow	Giri del tamburo Drum revolution	Velocità di tiro mt/min Line speed mt/min				
		mm		Kg					Strato di cavo avvolto / Layers				
						mm	l/min	Giri/rpm	1°	2°	3°	4°	5°
EPH 3600	1:5,3	10 23 mt+gancio Cod. 13700910232 35 mt+gancio Cod. 13700910358	1	3600	EPH 3600	10	40	30,56	10,74	12,66	14,58	16,50	18,42
			2	3060				38,67	13,59	16,02	18,45	20,88	23,31
			3	2650				47,16	16,58	19,54	22,50	25,47	28,43
			4	2350				30,56	10,93	13,24	15,54	17,84	-
			5	2100				38,67	13,84	16,75	19,67	22,58	-
		12 DIN 15020 23 mt+gancio Cod. 13700912230 35 mt+gancio Cod. 13700912356	1	3600		12	40	30,56	10,93	13,24	15,54	17,84	-
			2	2970				38,67	13,84	16,75	19,67	22,58	-
			3	2530				47,16	16,88	20,43	23,98	27,54	-
			4	2200				30,56	10,93	13,24	15,54	17,84	-
			5	-				38,67	13,84	16,75	19,67	22,58	-

Versione verricello Winch version	Peso senza cavo Weight without cable	Capacità cavo Wire rope capacity		Max capacità cavo Max. wire rope capacity	
	Kg	10 mm	12 mm	10 mm	12 mm
EPH 3600 (CORTO/SHORT)	39	35	25	45	30
EPH 3600 (LUNGO/LONG)	44	45	30	55	35


Grafici delle prestazioni al 1° strato
Performances charts at the 1° layer

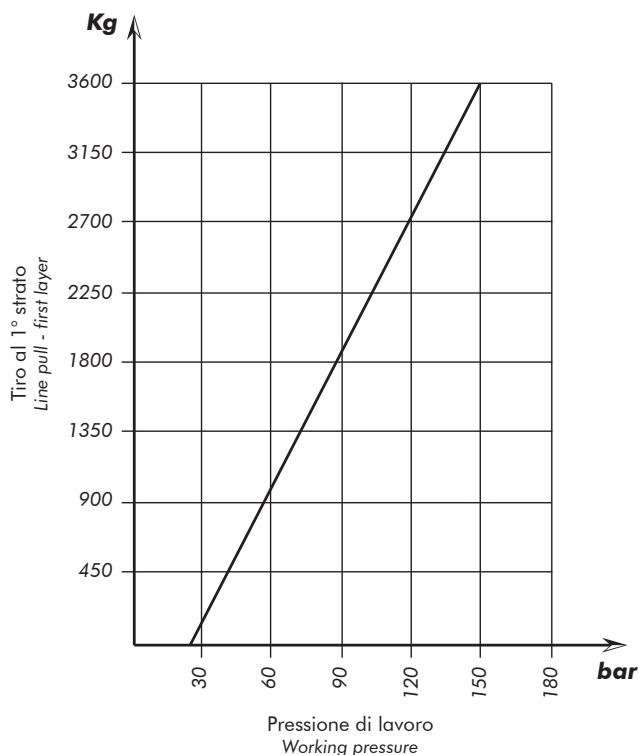

ATTENZIONE: Verricello già completo di olio. Per rabbocchi scatola riduttore utilizzare olio tipo 15/40 W MULTIGRADE (0,8 l) e per scatola freno olio tipo TIVELA SC320 (0,2 l).




WARNING: Winch provided with oil. To top up gear housing please use oil type 15/40 W MULTIGRADE (0,8 l) and for brake housing use oil type TIVELA SC320.

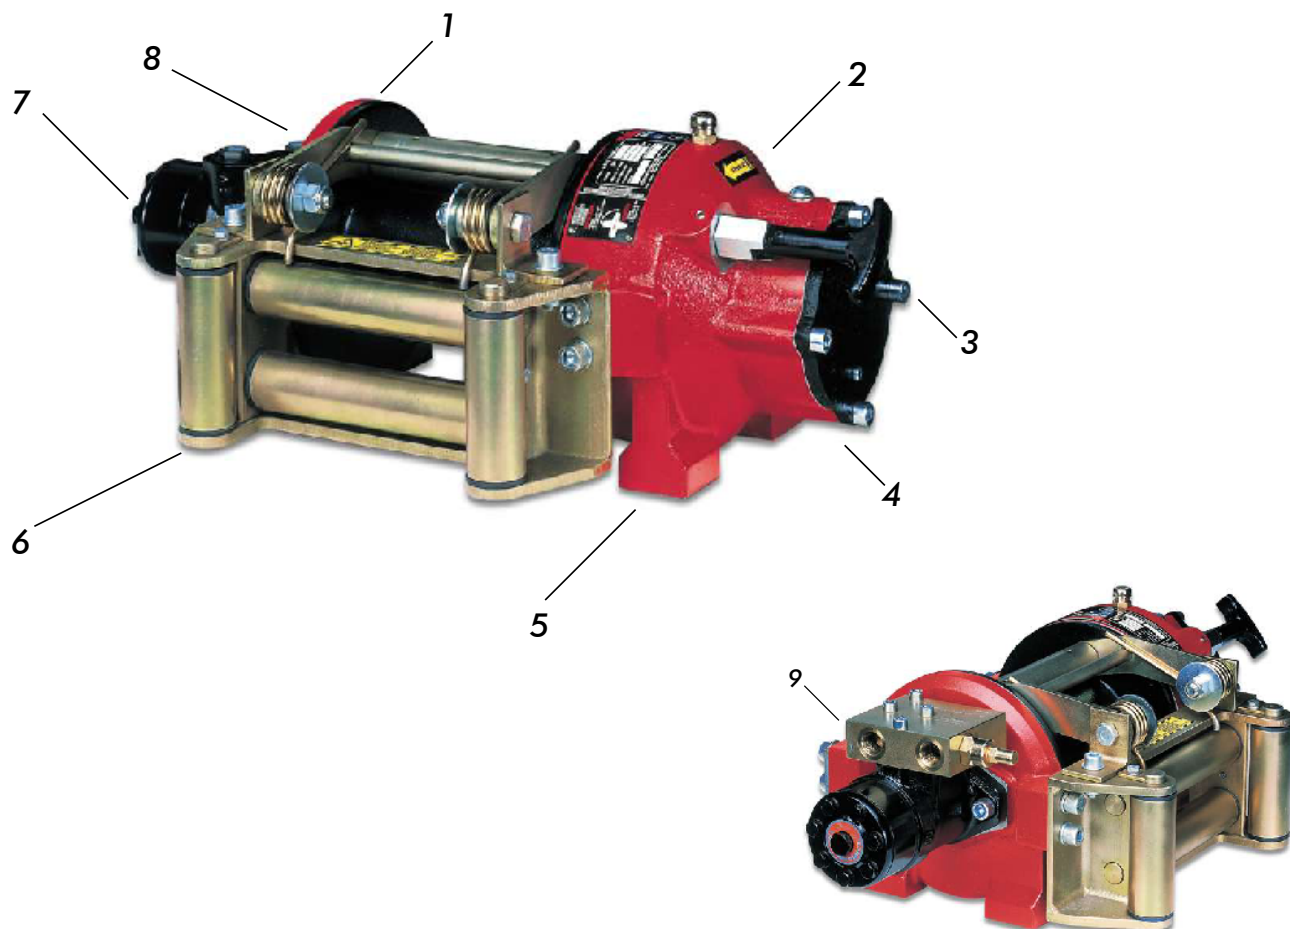

N°	Descrizione Description	
1	Tamburo: due differenti lunghezze di tamburo corto (200 mm) e lungo (252) mm	Drum: two drum length options short 200 mm and 252 mm long
2	Gruppo riduttore: riduttore epicicloidale ad uno stadio, interamente a bagno d'olio	Gear train: single stage planetary gears in oil bath
3	Innesto: innesto/disinnesto del tamburo manuale o pneumatico (optional)	Clutch (Freespooling): drum engaged-disengaged via manually operated clutch handle or air operated cylinder (optional)
4	Freno: ad elevate prestazioni, interamente a bagno d'olio	Brake system: high performance brake system in oil bath
5	Fissaggio: 12xM12 Punti di ancoraggio	Mounting foots: 12xM12 Threaded fixing holes
6	Guida fune: guidafune industriale zincato a rulli in acciaio funzionanti su boccole (optional)	Roller fairlead: heavy-duty galvanized roller fairlead with steel rollers fitted with composite bushes, reducing maintenance (optional)
7	Motore idraulico: motore idraulico orbitale orientabile 180°	Hydraulic motor: adjustable 180° Orbital hydraulic motor
8	Pressacavo: pressacavo zincato (optional)	Level winder: galvanized level winder (optional)
9	Valvola over-centre: (optional)	Over-centre valve: (optional)

Rulli in acciaio funzionanti su boccole
Steel rollers working on bushing

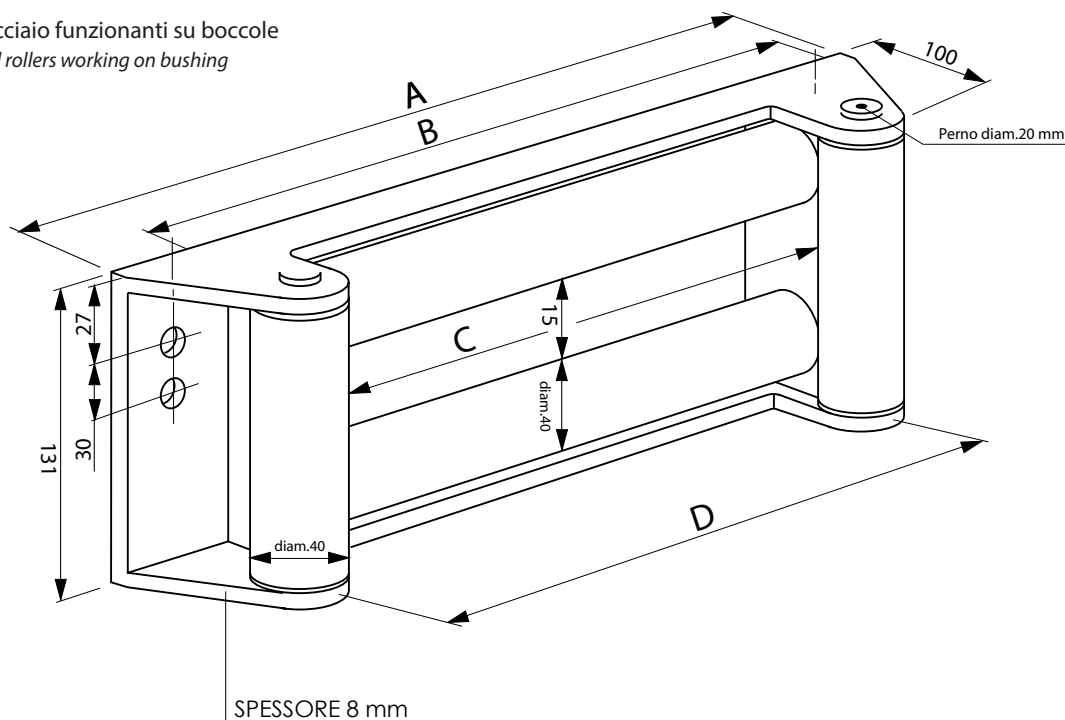

Descrizione / Description	Codice / Code	A	B	C	D
Guidafune Verricello mod. EPH 3600 TAMBURO STANDARD Roller fairlead winch mod. EPH 3600 STANDARD DRUM	13700700405	323	281	193	232
Guidafune Verricello mod. EPH 3600 TAMBURO LUNGO Roller fairlead winch mod. EPH 3600 LONG DRUM	13700700432	374	331	243	282



Descrizione / Description	Codice / Code	A
Pressocavo Verricello mod. EPH 3600 TAMBURO STANDARD + GUIDAFUNE Level winder Winch mod. EPH 3600 STANDARD DRUM + ROLLER FAIRLEAD	13700701306	196
Pressocavo Verricello mod. EPH 3600 TAMBURO LUNGO + GUIDAFUNE Level winder Winch mod. EPH 3600 LONG DRUM + ROLLER FAIRLEAD	13700701333	248