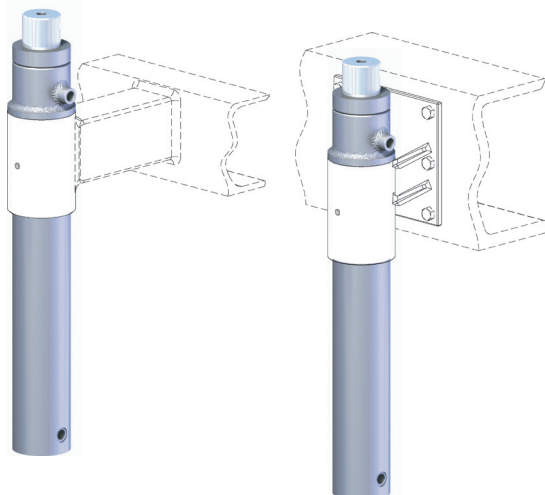


Cilindri oleodinamici per scarrabili Double acting cylinders for skip loaders Cilindri / Cylinders 60x40

Famiglia
Family
166500



Cilindri oleodinamici doppio effetto appositamente studiati per l'allestimento di attrezzature scarrabili per casse mobili su veicoli medi e pesanti.

I cilindri possono essere fissati direttamente al telaio con gli accessori forniti separatamente:

- piastra da imbullonare al telaio
- collare da saldare ad una traversa.

Per soddisfare i requisiti della normativa macchine si consiglia l'utilizzo di valvole di blocco.

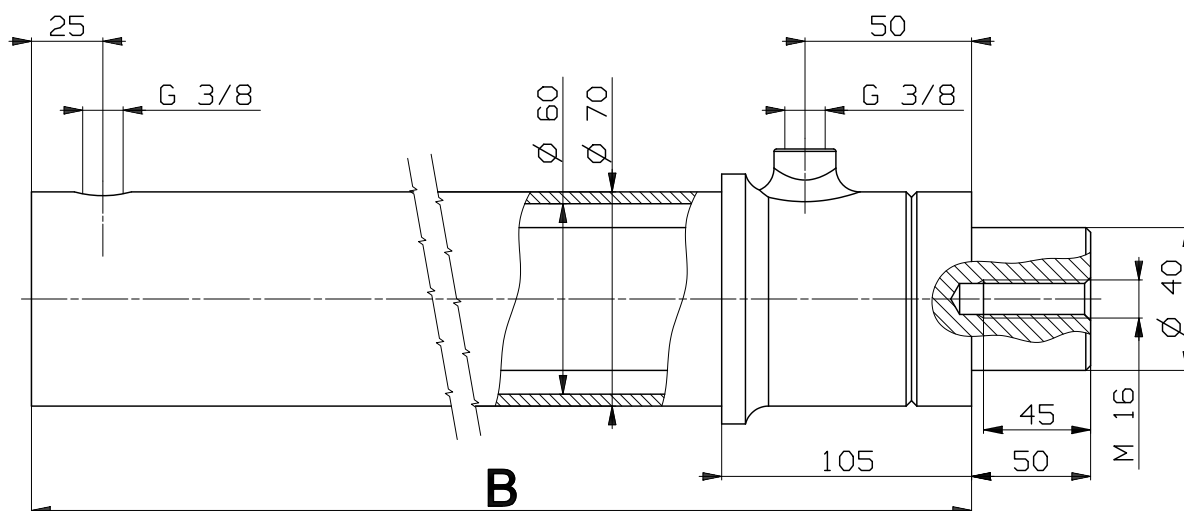
Double acting hydraulic cylinder designed for skip-loaders on medium and heavy-duty trucks.

These cylinders can be fitted through the following accessories to be ordered separately

- Plate to bolt onto the chassis.
- Collar to weld on a cross-member.


In order to match the CE safety standards we suggest using check valves.

Ingombro / Dimension



Dati tecnici / Technical features

Codice Code	Alesaggio Diameter mm	Stelo Rod mm	Corsa Stroke mm	B	Pressione Pressure Max. bar	Pressione esercizio Working pressure bar	Spinta Thrust 100 bar Kg	Tiro Pull 100 bar Kg	Peso Weight Kg
16650060306	60	40	300	468	220	160	2826	1570	8
16650060351			350	518					9,5
16650060404			400	568					11,5

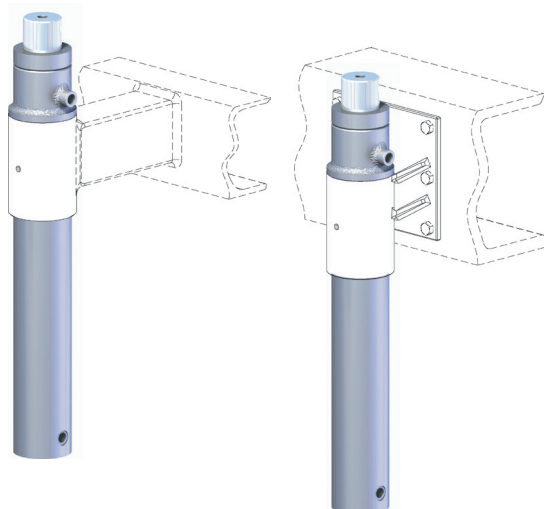

Cilindri oleodinamici doppio effetto appositamente studiati per l'allestimento di attrezzature scarrabili per casse mobili su veicoli medi e pesanti. I cilindri possono essere fissati direttamente al telaio con gli accessori forniti separatamente:

- piastra da imbullonare al telaio
- collare da saldare ad una traversa.

Per soddisfare i requisiti della normativa macchine si consiglia l'utilizzo di valvole di blocco.

N.B.: E' disponibile anche la versione con alesaggio da 60 mm e stelo da 40 mm per macchine leggere.

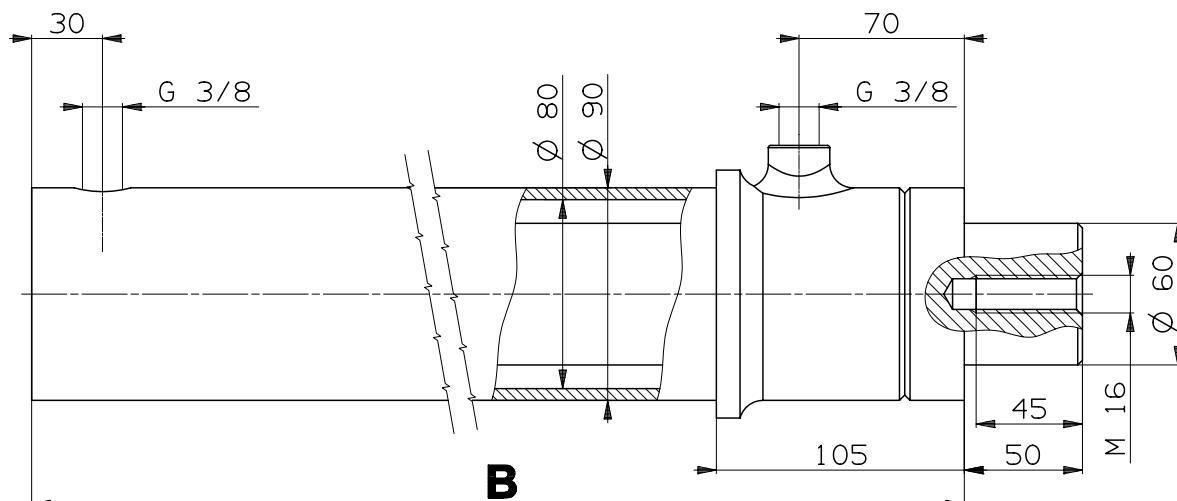
Double acting hydraulic cylinder designed for skip-loaders on medium and heavy-duty trucks. These cylinders can be fitted through the following accessories to be ordered separately

- Plate to bolt onto the chassis.
- Collar to weld on a cross-member.

In order to match the CE safety standards we suggest using check valves.






PS: it is available also a version for light-duty truck having 60mm diameter and 40mm rod.

Ingombro / Dimension



Dati tecnici / Technical features

Codice Code	Alesaggio Diameter mm	Stelo Rod mm	Corsa Stroke mm	B	Pressione Pressure Max. bar	Pressione esercizio Working pressure bar	Spinta Thrust 100 bar Kg	Tiro Pull 100 bar Kg	Peso Weight Kg
16650080302	80	60	300	495	200	120	5000	2194	18,5
16650080357			350	545					20,5
16650080400			400	595					22
16650080455			450	645					23,6
16650080508			500	695					25,2
16650080606			600	795					27

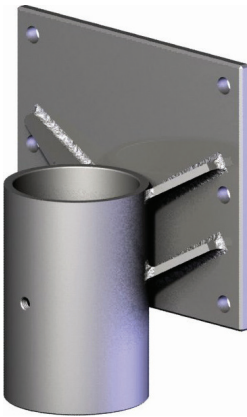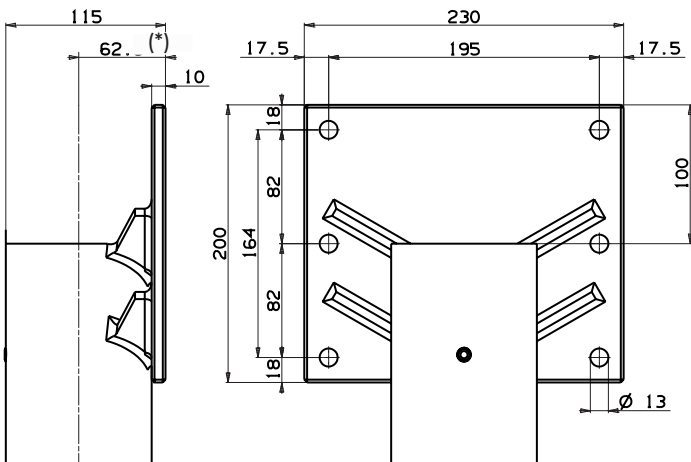Accessorio Accessories	Codice di ordinazione Order code	Ingombro Overall dimensions
Piastra da imbullonare Plate to bolt on 	16650100101 (ales. 80mm) 16650100085 (ales. 60mm)	 (*) Per cilindri alesaggio 80 = 62.5mm / alesaggio 60 = 52.5 mm (*) For cylinder diameter 80 = 62.5mm / diameter 60 = 52.5 mm
Collare da saldare Collar to weld on 	16650100049 (ales. 80mm) 16650100021 (ales. 60mm)	alesaggio 80 = Ø 105mm alesaggio 60 = Ø 85mm diameter 80 = Ø 105mm diameter 60 = Ø 85mm  alesaggio 80 = Ø 91.5mm alesaggio 60 = Ø 71.5mm diameter 80 = Ø 91.5mm diameter 60 = Ø 71.5mm
Manicotto per traversa Coupling for cross-member 	11490400121	
Puntale di centraggio Centering cone 	16650100209	
		15599000256 Kit raccordi / Fittings kit 12300400014 Valvola di blocco 3/8" 3/8" Block valve