

TAPPI A SFIATO CONTROLLATO

CAPS WITH CONTROLLED BREATHER

CODICE
CODE

118005

CARATTERISTICHE TECNICHE:

Valore di depressione (nella fase di aspirazione) bar 0,04-0,06.
Valore di pressione (in fase di scarico) bar 0,1-0,2.
Questi valori si riferiscono ad una variazione di volume dentro il serbatoio di circa 300 litri di liquido al minuto primo.

CAMPI DI IMPIEGO:

Serbatoi di olio, benzina, gasolio.

UTILITA'

Non inspira impurità, non sfiata liquido, non dà luogo a condensa di acqua nei serbatoi, riduce l'ossidazione dei liquidi e nel caso di serbatoi di benzina, evita le perdite per evaporazione.

TECHNICAL FEATURES:

Vacuum value (during suction phase) bar 0,04-0,06. Pressure value (during unloading phase) bar 0,1-0,2. These values are referred to a volume change within the tank of 300 lt. about/minute.


USE FIELDS:

Oil, fuel, petrol tanks.


USEFULNESS

It doesn't intake impurities, it does not leak liquid, it does not give rise to water condensate in the tanks. It reduces the oxidation of the liquid and in case of petrol tanks it avoids leakage to evaporation.



11800500078 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD - TIPO A SALDARE OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE - WELD TYPE

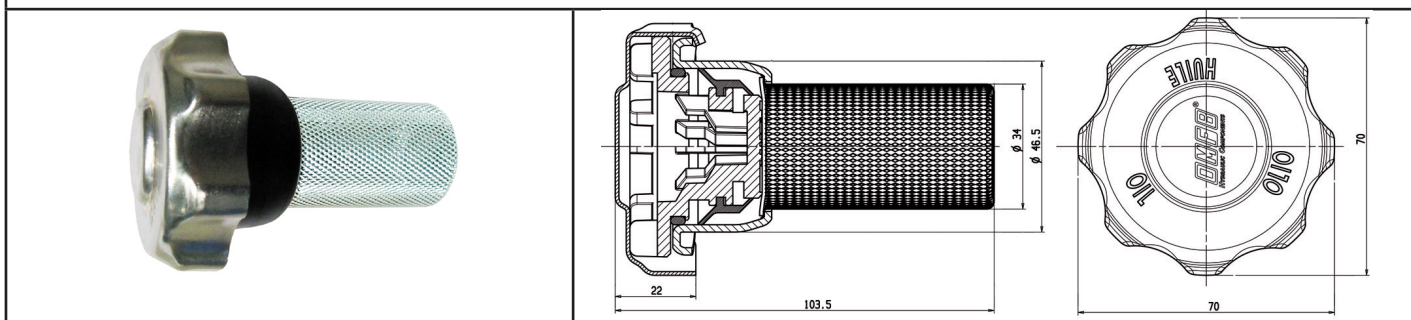

11800500112 TAPPO SFIATO PER CARBURANTE - TIPO A SALDARE FUEL BREATHER CAP - WELD TYPE

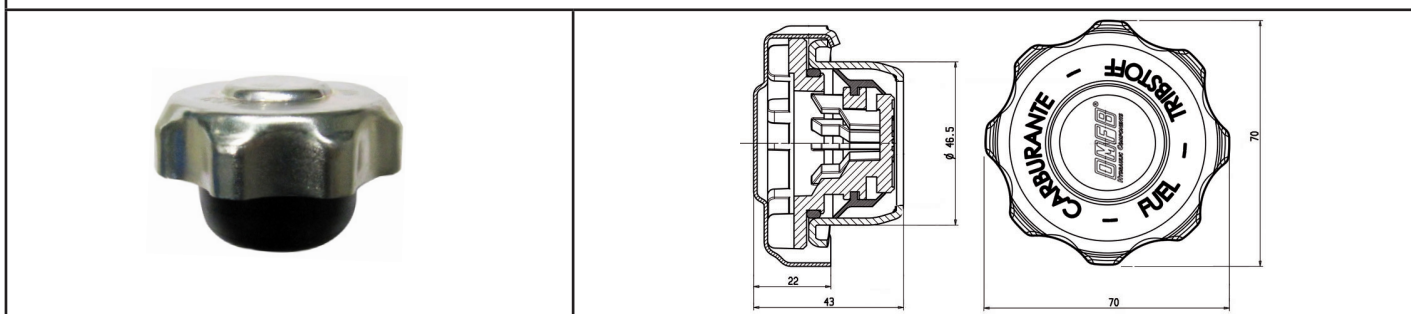

11800500096 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD - TIPO FLANGIATO OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE - FLANGED TYPE

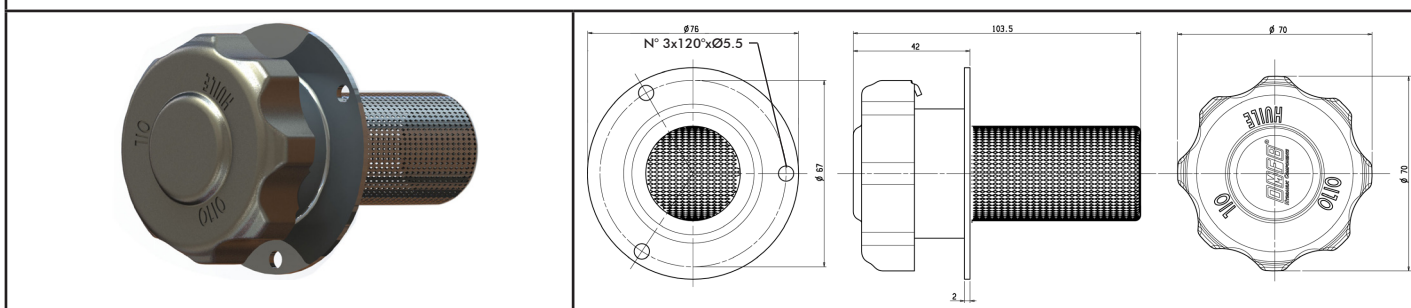

UNI ISO 1219/1

pag.1

O.M.F.B. Hydraulic Components


We reserve the right to make any changes without notice.
Edition 2012.10 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy
Tel.: +39.030.9830611 Fax: +39.030.983207-208
Internet: www.omfb.it e-mail: info@omfb.it

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =**


OMFB

HYDRAULIC COMPONENTS

11800500121 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD E ASTA LIVELLO - TIPO A SALDARE
OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE AND LEVEL ROD - WELD TYPE

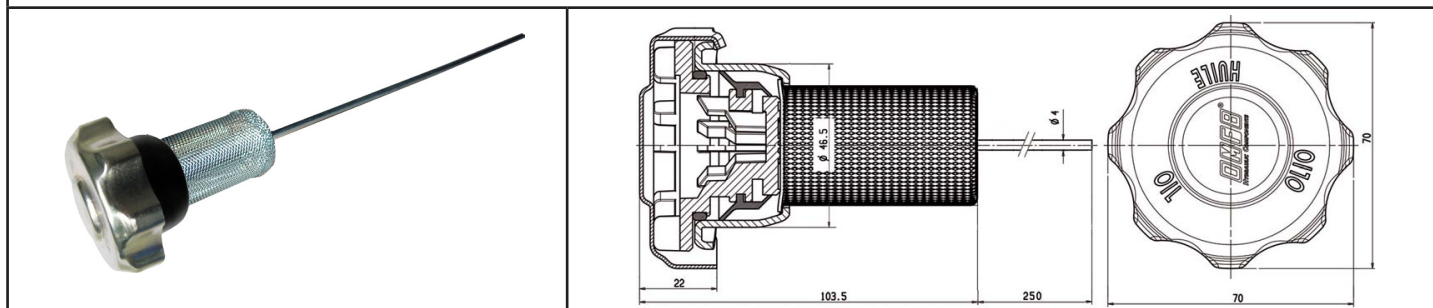

11800500130 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD E ASTA LIVELLO - TIPO FLANGIATO
OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE AND LEVEL ROD - FLANGED TYPE

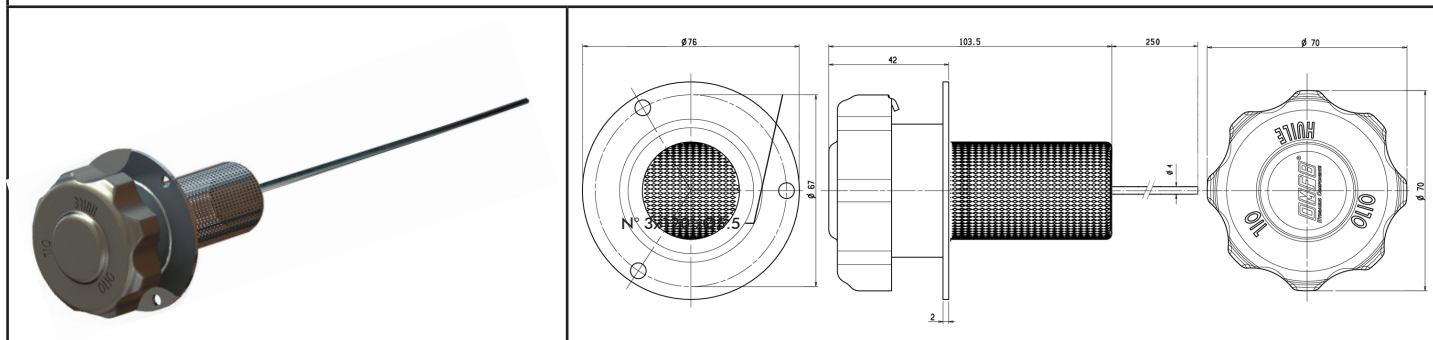

ACCESSORI - ACCESSORIES

 11800600031 CARTUCCIA FILTRANTE STANDARD STANDARD FILTERING CARTRIDGE	 11800600059 CALOTTA A SALDARE WELDING COVER	 11800600077 CALOTTA FLANGIATA CON OR FLANGED COVER WITH OR	 11800600068 CARTUCCIA FILTRANTE CON ASTA LIVELLO FILTERING CARTRIDGE WITH LEVEL ROD
 11800600102 TAPPO PER OLIO OIL CAP	 11800600120 TAPPO PER CARBURANTE FUEL CAP		